

EDGE E²



27-220 SERIES

SMART CARD READERS

FEATURES

- Control up to 2 gates/doors
- 1 Wiegand input
- 2 event inputs
- 2 digital inputs
- 3 proximity card reader options
- Bluetooth connectivity
- App-based programming and management
- SBI Flex™ 64-bit and standard 26-bit protocol



MODELS

- **27-220** - Edge E2 SecurePass Smart Card Reader*
- **27-225** - Edge E2 SecurePass Smart Card Reader + Intercom*

* HID and Secura Key versions also available.



GET THE EDGE SMART KEYPAD APP



POWERFULLY SIMPLE APP

All programming and management can be done quickly and securely via the app.

SBI FLEX 64-BIT PROTOCOL

Our proprietary Wiegand protocol allows for 4- to 11-digit keypad codes with 3-digit facility code for maximum flexibility.

DUAL 365-DAY TIMERS

A separate 365-day timer on each relay gives you the versatility and control you need.

CONFIGURABLE USER PERMISSIONS

Set specific user permissions on all keypad codes, transmitters, card readers, and long-range tag readers independently.



SPECIFICATIONS

PHYSICAL

Dimensions	6.21"(H) x 7.44"(W) x 5.25"(D)
Shipping Weight	5 lbs.

ELECTRICAL

Input	12-24 VAC/DC 12-VDC power supply included (PS-12DC1)
Current Draw	less than 111 mA @ 12 VDC less than 60 mA @ 24 VDC with one relay latched and LED components on

RELAY

Contact Rating	10 A @ 120 VAC / 24 VDC
----------------	-------------------------

COMMUNICATION

Connection	Bluetooth
------------	-----------

ENVIRONMENTAL

Operating Temperature	-15 to 158 °F
-----------------------	---------------

▲ Actual voltage should be no more than 10% beyond specified range. Use of the included 12-VDC transformer is recommended.

CONTROL IT YOUR WAY



APP[†]




WIEGAND DEVICES

[†] Administrator only

CONNECTIVITY



BLUETOOTH

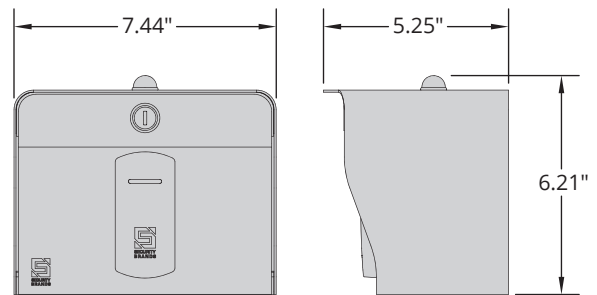

Model 27-220 shown

AVAILABLE MODELS (SEE PRICE GUIDE TO SEE ALL MODELS)



EDGE E2 SECUREPASS
Card Reader (SecurePass)
27-220



EDGE E2 HID
Card Reader (HID)
27-220HID



EDGE E2 SECUREPASS + INTERCOM
Card Reader (SecurePass) w/ Intercom
27-225