

# ADVANTAGE ONE

26-1000 SERIES

1,000-CODE KEYPADS WITH SMART LEDS

## FEATURES

- Control up to 2 gates/doors
- 1,000 four-digit code capacity
- Latch code
- Sleep code
- Personal master code
- "3 strikes, you're out" security
- Variable relay time
- Silent mode
- Timed anti-passback
- Event input
- Audible-tone and Smart LED feedback
- Multicolor-LED-backlit keypad
- Optional intercom / Knox keyswitch cutout



## ADVANTAGE

RELIABLE ACCESS CONTROL FOR OVER 40 YEARS

### NO-NONSENSE OPERATION

If you're looking for keypads that are easy to program and easy to use, look no further!

### SMART LEDS

The keypad backlights change color depending on the current state of the keypad, making it exceptionally easy to use.

### STURDY AND DURABLE

All our products are made from high-quality materials that will last for years to come.

### PROGRAMMING YOU KNOW

Quick, simple, and familiar, the basic programming steps on the keypad are identical to those on all our keypads.

[www.ShopAmericanAccess.com](http://www.ShopAmericanAccess.com) | (888) 378 - 1130  
[Sales@ShopAmericanAccess.com](mailto:Sales@ShopAmericanAccess.com)

## SPECIFICATIONS

### PHYSICAL

#### 26-1000

Dimensions 5.22"(H) x 5.22"(W) x 5.10"(D)

Shipping Weight 4 lbs.

#### 26-1000I / 26-1000K

Dimensions 5.80"(H) x 7.45"(W) x 5.25"(D)

Shipping Weight 6 lbs.

### ELECTRICAL

Input 12-24 VAC/DC  
power supply not included

Current Draw less than 67 mA @ 12 VDC  
less than 35 mA @ 24 VDC  
with relay latched and backlit components on

### RELAY

Contact Rating 3 A @ 24 V / 3 A @ 120 V  
DC Load / AC Load

Variable Relay Time 1-9999 seconds

### ENVIRONMENTAL

Operating Temperature -13 to 158 °F

**i** Mounting hardware is included.

## KEYPAD LED FEEDBACK

Multicolor Smart LEDs pair with audible tones to provide intuitive cues for every keypad interaction.



Ready



Program Mode



Valid Entry



Relay A Latched



Invalid Entry



Relay B Latched


## MOUNTING

Four mounting holes are evenly spaced in a square pattern around a center wiring pass-through hole.

Mounting-hole pattern spacing **3.08"**

Mounting-hole diameter **0.38"**

Wiring pass-through diameter **0.88"**

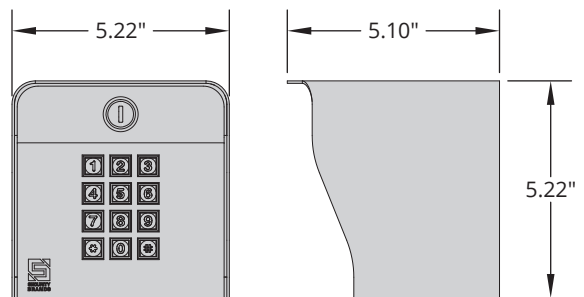

## AVAILABLE MODELS



**26-1000**  
Post Mount



**26-1000I**  
Post Mount w/ Intercom



**26-1000K**  
Post Mount w/ Knox Cutout