

RIDGE 2.0



S-14-500

BATTERY-POWERED WIRELESS DIGITAL KEYPAD & TRANSCEIVER

FEATURES

- 500 four-digit access-code capacity
- Latch mode
- Wireless range up to 500 feet
- Control up to 2 devices from 1 keypad
- Connect up to 20 keypads to 1 transceiver
- Personal master code
- Limited-use code (1 to 9 uses)
- "3 strikes, you're out" security
- Variable relay time
- Audible tones and LED feedback
- LED nightlight
- Polycarbonate construction



GOES WHERE YOU GO

No wires mean freedom—this device can be located and mounted anywhere you need it.

FITS YOUR NEEDS

Whether it's a simple installation or a multiple-keypad, multiple-device setup, your configuration options are limitless.

SOLAR FRIENDLY

An ultra-low current draw means it plays well with your solar gate operator.

GO WIRELESS

Our cutting-edge RCP Wireless™ allows two-way wireless connection, making your system more versatile and more responsive.



SPECIFICATIONS (KEYPAD)


ELECTRICAL

Input 9 VDC *

ENVIRONMENTAL

Operating Temperature -15 to 175 °F

* Includes 9-V alkaline battery.

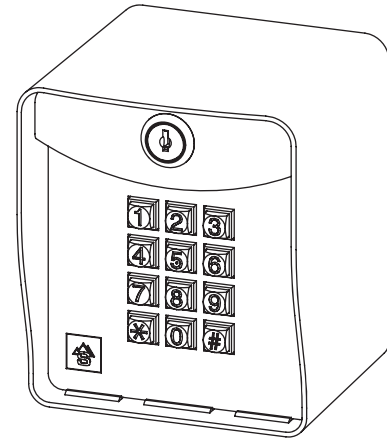

S-14-500t
KEYPAD

SPECIFICATIONS (TRANSCIVER)

ELECTRICAL

Input 12–24 VAC/DC

Current Draw less than 7.9 mA @ 12 VDC
standby

less than 11.2 mA @ 12 VDC
with relay latched

RELAY

Contact Rating 2 A @ 30 V / .5 A @ 120 V
DC Load / AC Load

Max Switching Voltage 125 V / 125 V


Max Carrying Current 2 A / 2 A

Max Switching Power 24 W / 60 VA

Variable Relay Time 1–999 seconds

ENVIRONMENTAL

Operating Temperature -15 to 175 °F



S-14-REC20
TRANSCIVER

AVAILABLE MODELS

MODEL	DESCRIPTION	DIMENSIONS	SHIPPING WT.
S-14-500	keypad and transceiver	n/a	4 lbs.
S-14-500t	keypad only	5-3/4"(H) x 4-5/8"(W) x 4-1/2"(D)	3 lbs.
S-14-REC20	transceiver only	5-1/4"(H) x 2-3/4"(W) x 1-1/8"(D)	1 lb.